

ePMP Force 110 PTP



Wireless service providers and enterprises around the globe need affordable, reliable high performance links for their network backbone and to connect high value customers. As spectrum increasingly becomes a scarce commodity, finding the right broadband solution that optimizes the use of spectrum is critically important. These applications need a solution with low latency and superior packet processing capability in order to ensure high quality of service. The Force 110 PTP meets these stringent requirements at an affordable price.

The ePMP Force 110 PTP:

- Delivers up to 220 Mbps of real user throughput
- Achieves 2 ms of round-trip latency
- Comes equipped with a high gain (25 dBi) dish antenna for long range
- Has high processing capability for optimized throughput
- Provides a 802.3af compliant Gigabit Ethernet port
- Includes eFortify – Cambium’s unique capabilities to maintain consistent performance even in high interference environments – and eCommand – a suite of tools and features that include Cambium’s renowned LINKPlanner application

The Force 110 PTP is comprised of the ePMP 1000 Connectorized Synchronized Radio and the ePMP110A-525 Dish. Operating in the 5 GHz frequency spectrum, the solution brings wireless broadband connectivity to customers over longer distances and provides a superior return on investment.

The platform supports bandwidth-intensive services such as VoIP, video and data utilizing ePMP’s advanced QoS mechanism, delivering high performance and exceptional reliability in difficult RF conditions.

It is the most efficient connectivity solution for reaching the under and unconnected around the world.

SPECIFICATIONS

PRODUCT

Model Number	5 GHz: C050900P011A/C050900B051A , B151A, B251A (ROW), C058900P112A/58900B052A (FCC), C050900P013A/C050900B053A (EU)
--------------	--

SPECTRUM

Channel Spacing	Configurable on 5 MHz increments
Frequency range	5 GHz 5150 – 5970 MHz (exact frequencies as allowed by local regulations)
Channel Width	5, 10, 20 or 40 MHz

INTERFACE

MAC (Media Access Control) Layer	Cambium Proprietary
Physical Layer	2x2 MIMO/OFDM
Ethernet Interface	100/1000 BaseT, rate auto negotiated (802.3af compliant)
Protocols Used	IPv4/IPv6 (Dual Stack), UDP, TCP, ICMP, SNMPv2c, NTP, STP, IGMP, SSH
Network Management	IPv4/IPv6, HTTPS, SNMPv2c, SSH, Cambium Networks CnMaestro™
VLAN	802.1Q with 802.1p priority

PERFORMANCE

ARQ	Yes
Nominal Receive Sensitivity (w/FEC) @ 20MHz Channel	MCS0 = -93 dBm to MCS15 = -69 dBm (per branch)
Nominal Receive Sensitivity (w/FEC) @ 40MHz Channel	MCS0 = -90 dBm to MCS15 = -66 dBm (per branch)
Modulation Levels (Adaptive)	MCS0 (BPSK) to MCS15 (64QAM 5/6)
Quality of Service	Three level priority (Voice, High, Low) with packet classification by DSCP, COS, VLAN ID, IP & MAC Address, Broadcast, Multicast and Station Priority
Transmit Power Range	-17 to +30 dBm (combined, to regional EIRP limit) (1 dB interval)

PHYSICAL

Surge Suppression	1 Joule Integrated
Environmental	IP55
Temperature	-30°C to +60°C (-22°F to +140°F)
Weight	4.1 kg (9 lbs)
Wind Survival	145 km/hour (90 mi/hour)
Dimensions (Dia x Depth)	47 cm x 27 cm (18.5 in x 10.6 in)
Pole Diameter Range	5.7cm -7.6cm (2.25in - 3in)
Power Consumption	10 W Maximum, 7.5 W Typical
Input Voltage	23 to 56 V

SECURITY

Encryption	128-bit AES (CCMP mode)
------------	-------------------------

CERTIFICATIONS

FCCID	5 GHz: Z8H89FT00012
Industry Canada Cert	5 GHz: 109W-00012
CE	5.4 GHz EN 301 893 V2.1.1 5.8 GHz EN 302 502 V2.1.1

Notes:

C050900B051A (ROW) – consists of a ePMP Radio Module [C050900R051A/C050900P011A] (no power cord) and ePMP Dish Antenna [C050900D007B]

C050900B151A (ROW) – consists of a ePMP Radio Module [C050900R051A/C050900P011A] (US cord) and ePMP Dish Antenna [C050900D007B]

C050900B251A (ROW) – consists of a ePMP Radio Module [C050900R051A/C050900P011A] (EU cord) and ePMP Dish Antenna [C050900D007B]

C058900B052A (FCC) – consists of a ePMP Radio Module [C058900R052A/C058900P112A] and ePMP Dish Antenna [C050900D007B]

C050900B053A (EU) – consists of a ePMP Radio Module [C050900R053A/C050900P013A] and ePMP Dish Antenna [C050900D007B]


SPECIFICATIONS

ANTENNA SPECIFICATIONS	5 GHZ SPECIFICATION
Frequency Range	5150 – 5970 MHz
Antenna type	DISH
Peak Gain	25 dBi
3dB Beamwidth-Azimuth	7°
3dB Beamwidth-Elevation	7°
Front-to-Back Isolation	>25 dB
Cross Polarization	>15 dB

AZIMUTH & ELEVATION PATTERNS


ePMP Force 110 PTP Azimuth Patterns

H-POL Elevation Gain (dBi) or Zero Azimuth

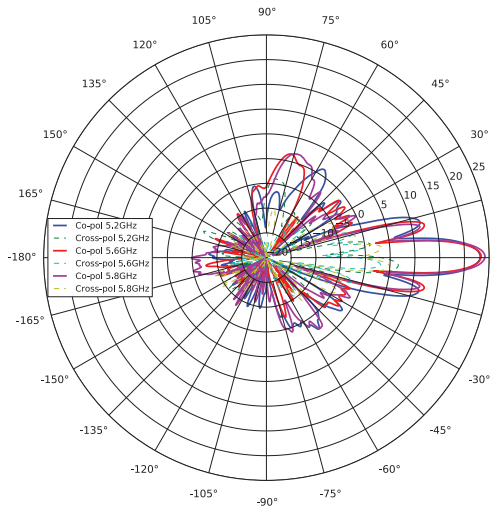


ePMP Force 110 PTP Elevation Patterns

H-POL Azimuth Gain (dBi) for Zero Elevation

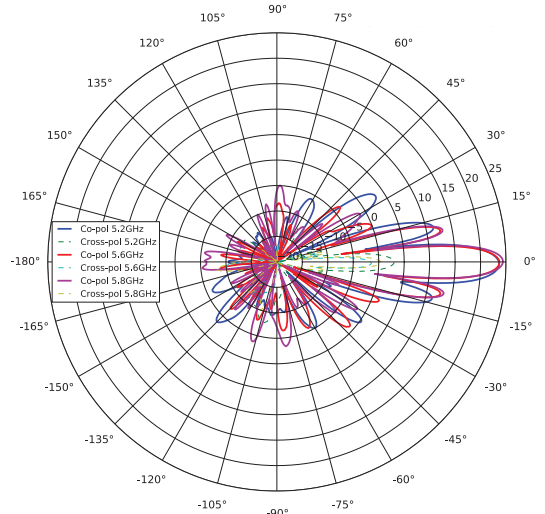

V -POL Elevation Gain (dBi) for Zero Azimuth

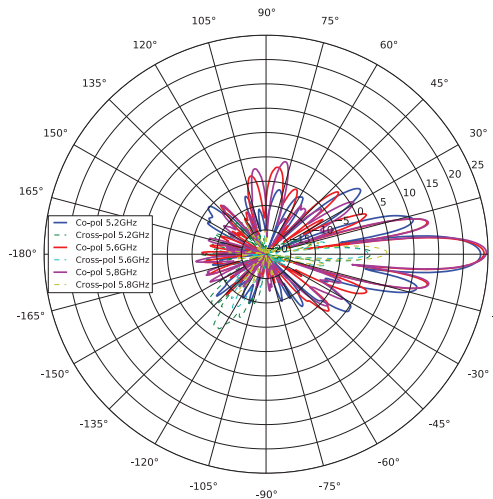

V-POL Azimuth Gain (dBi) or Zero Elevation

