



Wireless That Just Works

cambiumnetworks.com

USA Headquarters

3800 Golf Road, Suite 360
Rolling Meadows, IL 60008 USA
+1 888 863 5250

India Office

Cambium Networks Consulting Private Ltd
5th Floor, Quadrant 1, Umiya Business Bay, Tower 2,
Outer Ring Road,
Kadubisenahalli, Varthur Hobli Road,
Bangalore East
+91 80 67333100

UK Office


Unit B2, Linhay Business Park
Eastern Road Ashburton, United Kingdom, TQ13 7UP
+44 1364 655500

USA Thousand Oaks Office

2545 Hillcrest Dr, Suite 220
Thousand Oaks, CA 91320

USA San Jose Office


2590 N. 1st Street, Suite 220
San Jose, CA 95131 USA

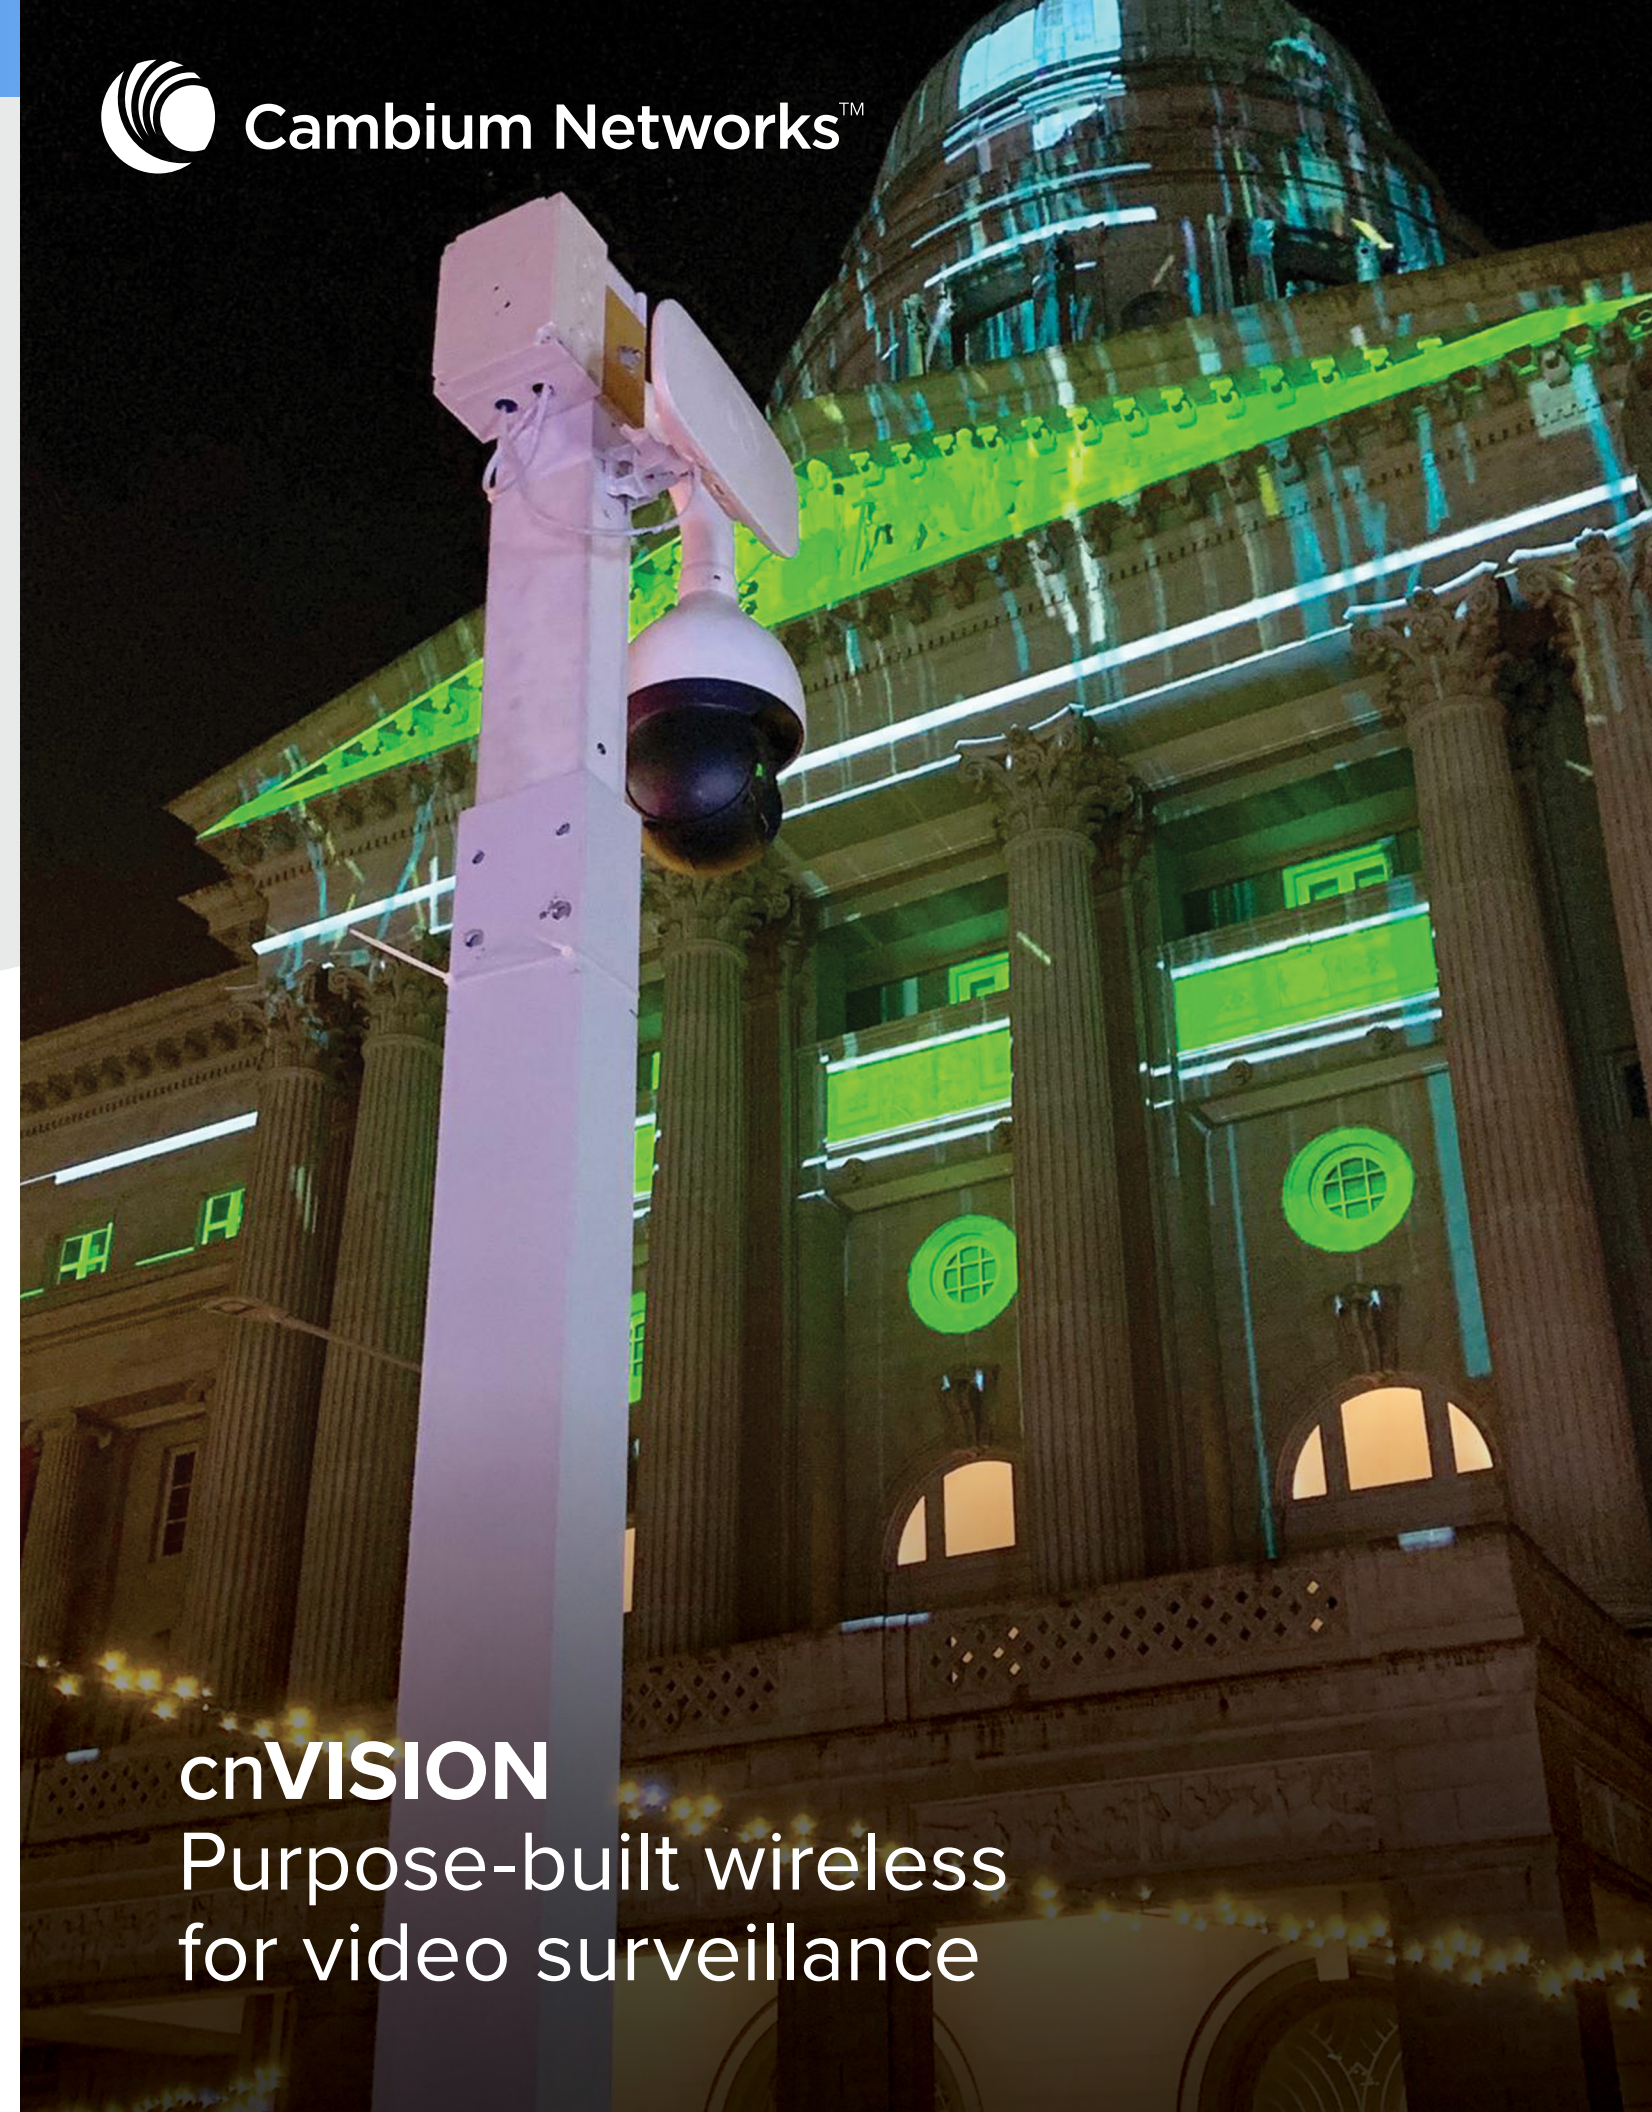

cnVISION
Purpose-built wireless
for video surveillance

The power of cnVision

Wherever you need to put a camera, **cnVision** makes a connection.

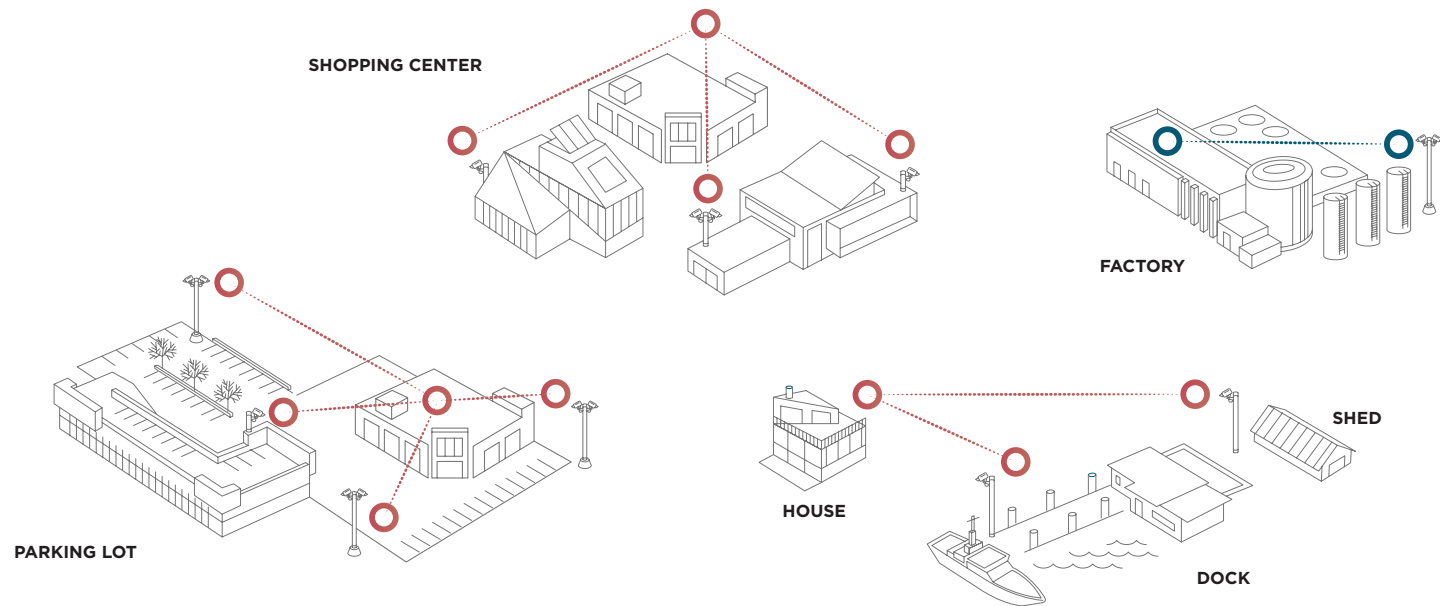

Hub-and-spoke Connection

Point-to-point Connection



Security

cnVision solutions incorporate the latest encryption technologies and security practices. After all, you simply cannot compromise security when it comes to backhauling mission-critical video.

User security via different login privileges, RADIUS authentication, HTTPS browser access, SSH and 128-bit AES data encryption with proprietary protocol makes cnVision the last thing to worry about in your network.


Reliable Transmission

Losing a critical frame in your video transmission is unacceptable. With a deterministic protocol, high resiliency to interference and a built in packet re-transmission mechanism, cnVision ensures that those critical video frames arrive when they need to. Adapting to changing environments, cnVision can shift gears just like the transmission in a car to ensure reliable delivery of critical video.

ONVIF and Stream Detection Support

With a built-in ONVIF client, cnVision products can detect and display camera hardware models and system information from ONVIF Conformant cameras.

Stream detection capability allows viewing of the camera feed from within cnVision clients and future quality of service additions.

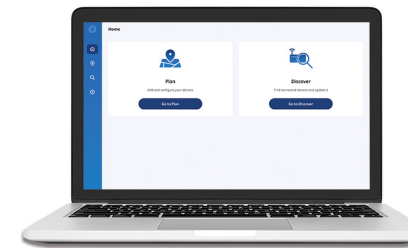

Ease of Planning, Discovery and Managing

With a comprehensive set of features under the cnVision Companion App, you can confidently plan your camera deployment and know exactly which cnVision products to choose and what capacity to anticipate. The Discovery component allows you to pre-stage the equipment and perform system maintenance and software upgrades.

Reliability and Flexibility

cnVision comes with a wide range of hardware choices to incorporate into your CCTV deployment. We offer simple point-to-point solutions as well as hub-and-client based multipoint solutions. From across the parking lot to across town, just about every deployment need is covered.

Reliability ratings supporting both IP55 and IP67 and temperature ratings from -30°C to +60°C and an industry leading 3-year warranty, your mind is at ease with cnVision.

VMS Integration

cnVision Hub & Clients can be integrated into major VMS platforms. Key parameters related to the backhaul link and major events can trigger and display information from the same VMS platform managing the cameras.

24/7 Support

cnVision comes with Cambium Networks support via telephone, email and online forums. For any deployment projects, a real person is available to answer your questions.



Model	Dedicated HUB		Dual Purpose Hardware - Hub or Medium Range Client		Long Range Client	Hub Antenna
	HUB-FLEXr (with GPS Sync)	HUB-360	CLIENT MICRO	CLIENT MINI	CLIENT MAXr	TWISTPORT & 60deg HORN
Frequency Band(s)	4.910 GHz to 5.970 GHz	4.910 GHz to 5.970 GHz	4.910 GHz to 5.970 GHz	4.910 GHz to 5.970 GHz	4.910 GHz to 5.970 GHz	5.18GHz to 6.00GHz
Channel Size	20/40/80 MHz	20/40/80 MHz	20/40/80 MHz	20/40/80 MHz	20/40/80 MHz	
Max Tx Power	+29 dBm	+29 dBm	+28 dBm	+29 dBm	+29 dBm	
Max Throughput	600Mbps	600Mbps	600Mbps	600Mbps	600Mbps	
Interface	Gigabit Ethernet, 100/1000BaseT	Gigabit Ethernet, 100/1000BaseT	Gigabit Ethernet, 100/1000BaseT	Gigabit Ethernet, 100/1000BaseT	Gigabit Ethernet, 100/1000BaseT	
Power	30V Passive POE (14-30V) 4.5 +; 7.8 - l orl 4.5 -; 7.8 + 7W typical, 12W max	56V Passive POE (37-56V) 4.5 +; 7.8 - l orl 4.5 -; 7.8 + 7W typical, 12W max or 802.3af	30V Passive POE (14-30V) 4.5 +; 7.8 - l orl 4.5 -; 7.8 + 7W typical, 12W max	30V Passive POE (14-30V) 4.5 +; 7.8 - l orl 4.5 -; 7.8 + 7W typical, 12W max	30V Passive POE (14-30V) 4.5 +; 7.8 - l orl 4.5 -; 7.8 + 7W typical, 12W max	30V Passive POE (14-30V) 4.5 +; 7.8 - l orl 4.5 -; 7.8 + 7W typical, 12W max
Antenna Gain/Coverage	Connectorized*	8 dBi 360 degree	13 dBi 30 degree	16 dBi 15 degree	19dBi	17 dBi 60 degree
Mounting	1-2" Pole Mount included Wall Mount optional	1-2" Pole Mount included Wall Mount optional	1-2" Pole Mount included Wall Mount optional	1-2" Pole Mount included Wall Mount optional	1-2" Pole Mount included Wall Mount optional	22-80 mm Pole Mount included
Environmental	IP67 -22°F to +140°F (-30°C to +60°C)	IP67 -22°F to +140°F (-30°C to +60°C)	IP55 -22°F to +140°F (-30°C to +60°C)	IP55 -22°F to +140°F (-30°C to +60°C)	IP67 -22°F to +140°F (-30°C to +60°C)	IP55 -31°F to +131°F (-35°C to +55°C)
Configuration	Web GUI	Web GUI	Web GUI	Web GUI	Web GUI	
Monitoring	VMS, ONVIF supported	VMS, ONVIF supported	VMS, ONVIF supported	VMS, ONVIF supported	VMS, ONVIF supported	
Warranty	3 Year	3 Year	3 Year	3 Year	3 Year	3 Year
Common Part Numbers others available, see price list	CV-HC2RPUSA-US (FCC compliant, US Cord) CV-HC2RPUSA-IC (IC compliant, US Cord) CV-HC2RPEUA-EU (EU compliant, EU Cord) CV-HC2RPUKA-EU (EU compliant, UK Cord) CV-HC2RPEUA-RW (ROW compliant, EU Cord)	CV-H00RPUSA-US (FCC compliant, US Cord) CV-H00RPUSA-IC (IC compliant, US Cord) CV-H00RPEUA-EU (EU compliant, EU Cord) CV-H00RPUKA-EU (EU compliant, UK Cord) CV-H00RPEUA-RW (ROW compliant, EU Cord)	CV-D13SPUSA-US (FCC compliant, US Cord) CV-D13SPUSA-IC (IC compliant, US Cord) CV-D13SPEUA-EU (EU compliant, EU Cord) CV-D13SPUKA-EU (EU compliant, UK Cord) CV-D13SPEUA-RW (ROW compliant, EU Cord)	CV-D16SPUSA-US (FCC compliant, US Cord) CV-D16SPUSA-IC (IC compliant, US Cord) CV-D16SPEUA-EU (EU compliant, EU Cord) CV-D16SPUKA-EU (EU compliant, UK Cord) CV-D16SPEUA-RW (ROW compliant, EU Cord)	CV-C19RPUSA-US (FCC compliant, US Cord) CV-C19RPUSA-IC (IC compliant, US Cord) CV-C19RPEUA-EU (EU compliant, EU Cord) CV-C19RPUKA-EU (EU compliant, UK Cord) CV-C19RPEUA-RW (ROW compliant, EU Cord)	TPA-ePMP + HG3-TP-A60

*Requires 3rd party Ant 2 x 50 ohm, RP (Reverse Polarity) SMA Or RF Elements Twistport™ Adaptor